

Mobile Source Emissions Reduction Strategies For the NYMTC Region

By Nancy Mahadeo
Supervised by Larry McAulliffe

Overview

What are the strategies?

Why were they of research interest?


Findings

Conclusion



Four Vehicle Technologies



H₂

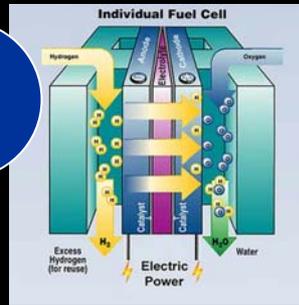

Hybrid Electric

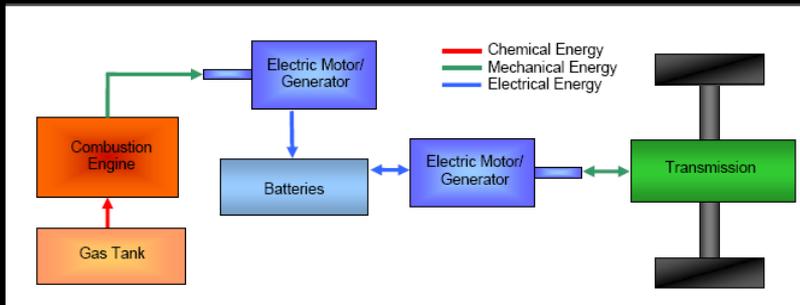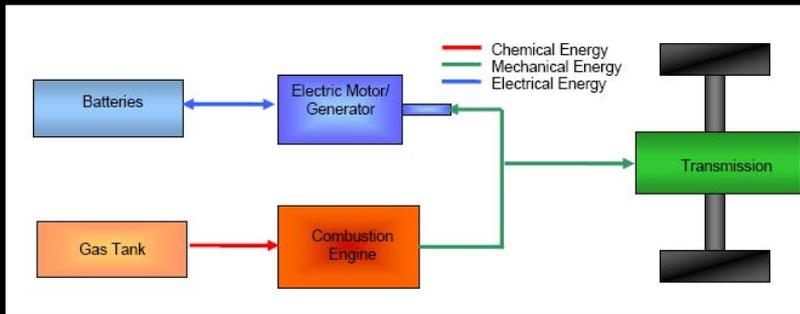


Incoming Buses

| Area | Reduction with Incoming Hybrids (tons/year) | | |
|-------------|--|-----|-----|
| | CO2 | PM | NOx |
| NYC | 198,251 | 102 | 542 |
| Westchester | 21,705 | 11 | 59 |
| Rockland | 5,989 | 3 | 16 |
| Putnam | 2,178 | 1 | 6 |
| Nassau | 27,292 | 14 | 75 |
| Suffolk | 30,225 | 15 | 83 |

All Buses

| Area | Reduction if All Vehicles Hybrid (tons/year) | | |
|-------------|---|-------|--------|
| | CO2 | PM | NOx |
| NYC | 6,608,377 | 3,385 | 18,052 |
| Westchester | 723,487 | 371 | 2,578 |
| Rockland | 199,628 | 102 | 1,000 |
| Putnam | 72,607 | 37 | 480 |
| Nassau | 909,717 | 466 | 16,494 |
| Suffolk | 1,007,495 | 516 | 2,921 |


Plug-In Hybrid

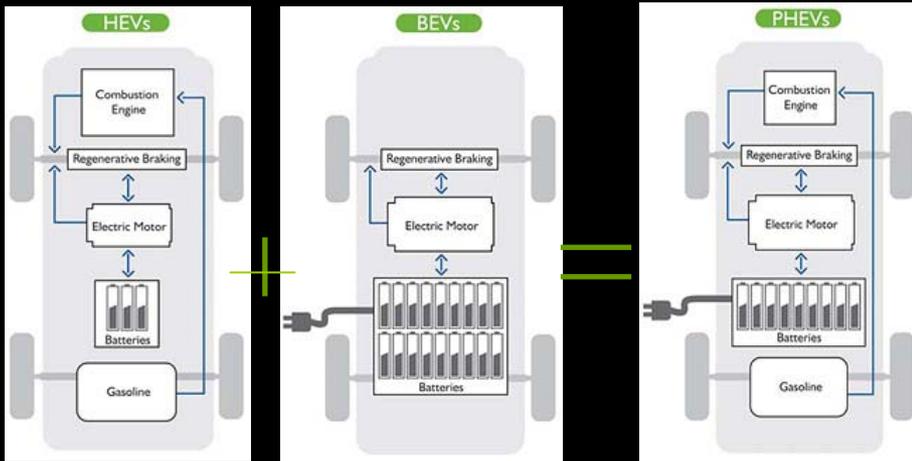

| | Electric Mode | | | Hybrid Mode | | |
|---------------|---------------|-----|-----|--------------|-----|-----|
| | (grams/mile) | | | (grams/mile) | | |
| | CO2 | PM | NOx | CO2 | PM | NOx |
| Passenger car | 73% | 14% | 88% | 35% | 35% | 35% |
| SUV | 74% | 18% | 88% | 35% | 35% | 35% |
| Truck | 86% | 50% | 93% | 65% | 61% | 61% |
| Transit bus | 87% | 54% | 93% | 22% | 13% | 13% |
| School bus | 79% | 24% | 89% | 64% | 60% | 60% |

| | Years to Payback |
|---------------|------------------|
| Passenger car | 7.6 |
| SUV | 5.8 |
| Truck | 8.7 |
| Transit bus | 3.5 |
| School bus | 5.2 |


Hydrogen

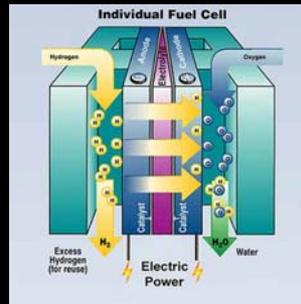

Natural Gas



Electrolysis

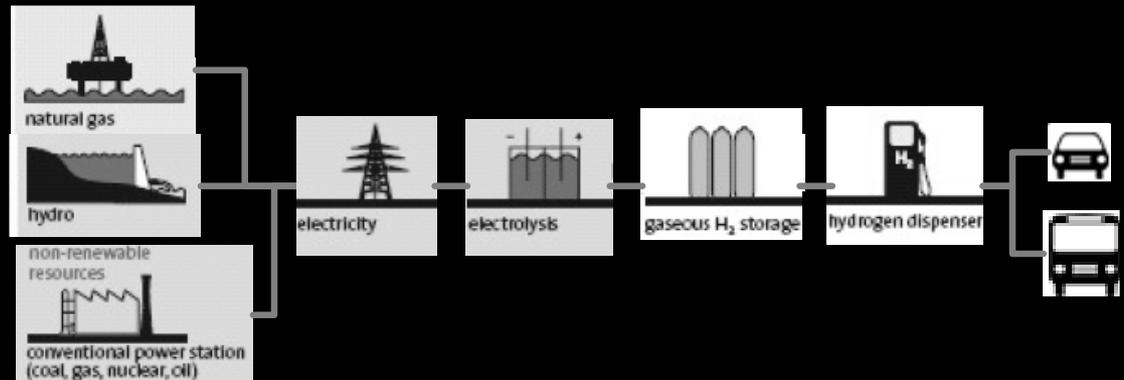

Hydrogen (Continued)

Natural Gas



| | CO2 | PM | NOx |
|---------------|------------|--------|--------|
| | grams/mile | | |
| Passenger car | -55.0% | -99.8% | -98.3% |
| SUV | -50.8% | -99.8% | -98.2% |
| Transit bus | -38.3% | -99.7% | -97.5% |

| | Years to Payback |
|---------------|------------------|
| Passenger car | 45 |
| SUV | 79 |
| Transit bus | 35 |

Electrolysis

| | CO2 | PM | NOx |
|---------------|------------|---------|--------|
| | grams/mile | | |
| Passenger car | -3.3% | 207.6% | -55.5% |
| SUV | 5.8% | 159.5% | -51.3% |
| Transit bus | 32.5% | -100.0% | -32.5% |

Clean Diesel

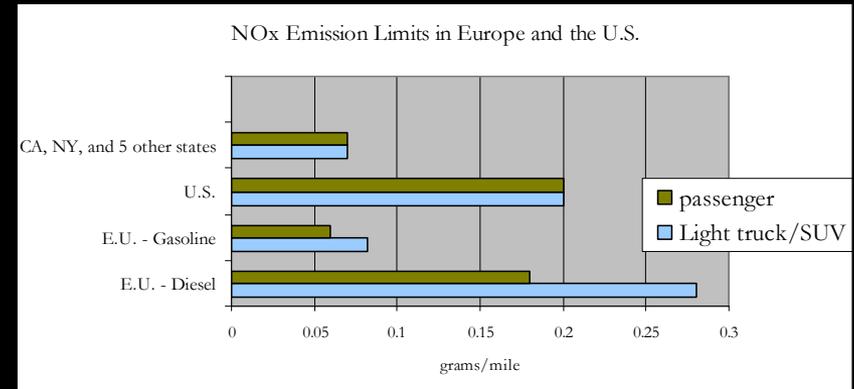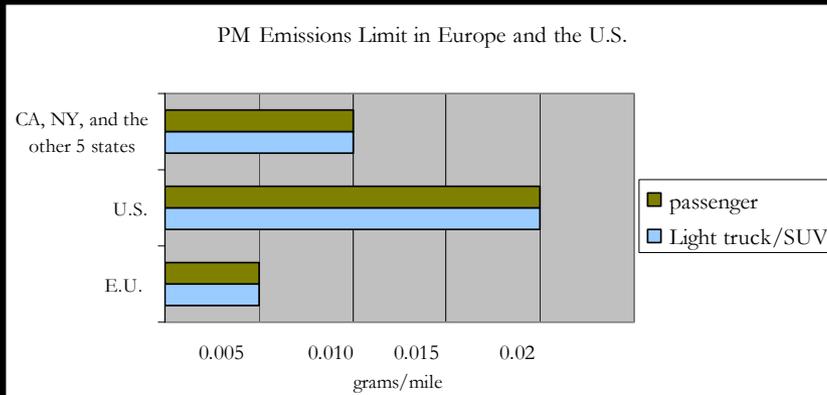

| | Premium Cost (\$) | Savings (\$/yr) | Years to Payback |
|---------------|-------------------|-----------------|------------------|
| Passenger car | \$17,100 | 262 | 65.2 |
| SUV | \$10,425 | 300 | 34.8 |

Conclusions

Hybrids → significant emissions reductions

Plug-In Hybrids → ready for implementation, 5-10 years

Hydrogen Fuel Cell Vehicles → ready for implementation 20+ years

Clean Diesel → not ready today; emissions standards more strict than Europe